



MU-60PZ95V

60" PLASMA HDTV MONITOR DISPLAY



SHOWN WITH
OPTIONAL STAND



OPTIONAL SPEAKERS
5.2"W x 34.8"H x 3.9"D
AP-60SA12



OPTIONAL STAND
45.7"W x 15.5"H x 16.3"D
AP-60DA13

1366 x 768p Resolution

High resolution format produces extremely detailed imagery

Improved! 3000:1 Contrast Ratio

Extremely sharp contrast between light and dark images

1000 cd/m² High Brightness

Renders an incredibly bright picture, even in well-lit areas

Image Sticking Minimization, Pixel Orbiter, White Wash, and Inversion Features

Reduce phosphor burn and prolong the life of the plasma

Aspect Ratio Correction

DVI with HDCP

Intelligent Image Scaling

O-Plus (Rembrandt) video processor

RS-232 Control and Discrete

IR Controls

Vertical Display Mode

Faroudja DCDi

Video de-interlacing and line doubling

Split Zoom (Self Video Wall)

2 Year Warranty

XD
ENGINE


HDTV
MONITOR

DCDi
by FAROUDJA

MU-60PZ95V 60" Plasma HDTV Monitor Display



DIMENSIONS

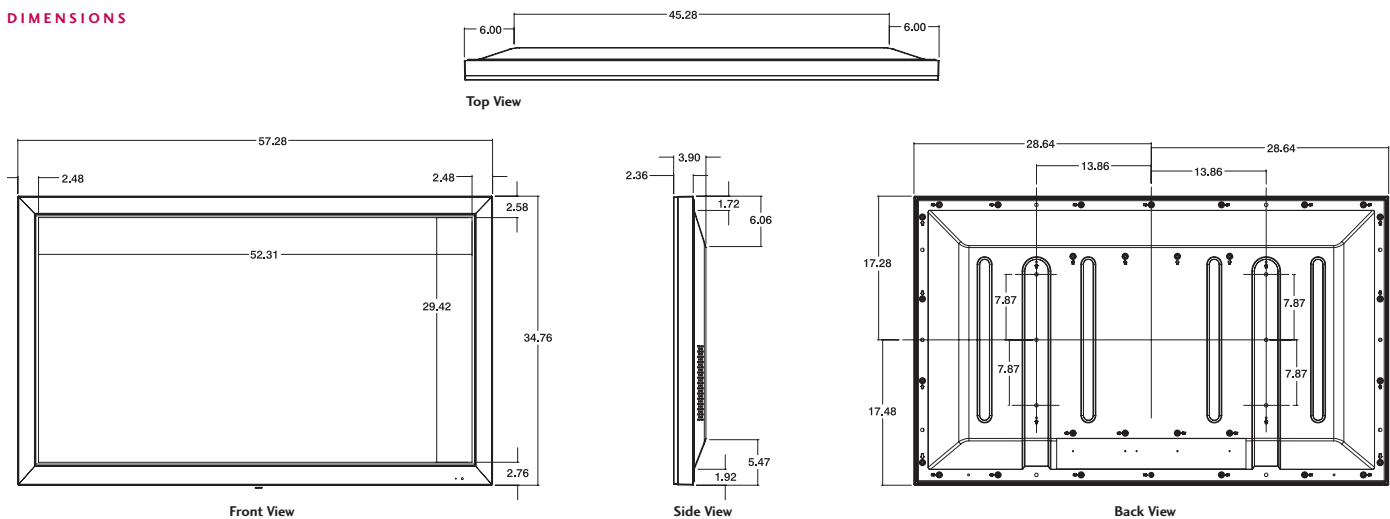

DIMENSIONS

Cabinet (W x H x D)	57.3" x 34.8" x 3.9"
Weight	154.3 Lbs.

CABINET DESCRIPTION

Finish	Brushed Silver
Power Consumption	650W (Max.)
Power Source	120v 60Hz

VIDEO

Screen Size	60"
Display Resolution	1366 x 768p
Pixel Pitch	0.343 (H) x 1.032 (V)
Aspect Ratio	16:9, 4:3 Zoom
Brightness	1000 cd/m ²
Contrast Ratio	3000:1
Viewing Angle	160°
Format Conversion	Intelligent Image Scanning
Aspect Ratio Correction	Yes
Scan Converter	XD Engine
Contrast	Yes
Brightness/Sharpness	Yes
Tint	Yes
Video De-Interlacing/Line Doubling	Faroudja DCDi

DISPLAY

Display Frequency	15.73 to 68Hz (H), 50 to 120Hz (V)
Displayable Colors	16.77M
Color Gradation Filter	Yes
Input Signal	NTSC, HD, VGA, SVGA, XGA, SXGA
Display Modes	Normal, Wide, Zoom
Color Temperature	User Adjustable

AUDIO

Mono/Stereo/MTS/SAP	Mono/Stereo
Bass/Treble/Balance	Yes
Total Audio (Watts) Output (External Speakers)	20W (2 x 10W)

SPECIAL FEATURES

Acoustic Noise Reduction	Yes
Picture In Picture (PIP)	Yes, Split Screen, Zoom
Multilingual Menus	English/Spanish/French/ Portuguese/Korean
1 Level Mute	Yes
Shock Absorbing Glass Damper	Yes, Tilt to 20°
RS-232 Control	Yes
Discrete IR Controls	Yes
Detachable AV Terminal	Yes
Auto-Power On	Yes
Discrete Power Off	Yes
Last Source On	Yes
Image Sticking Minimization	Pixel Orbiter, White Wash, Inversion
Display/Mode Change (Vertical)	Yes
Auto Off	Yes
Aspect Ratio Control	Yes
Split Zoom (Self Video Wall)	2 Units (1x1) 4 Units (2x2) 9 Units (3x3)

Clock

Timer	Yes
Key Lock	Yes

COMPATIBLE FORMATS

NTSC, VGA, SVGA, XGA, SXGA	1366 x 768p
HDTV	1366 x 768p

JACK PACK

Hi-Res Component Video	1
Audio Left/Right In/Loop Out	3
Composite In	1
RGB In (15-Pin Type-D Connector)	1
S-Video In	1
RS-232C (9-Pin Connector)	1
DVI with HDCP	1
IR Jack	1
External Speaker Push Terminals	Yes

OPERATING ENVIRONMENTS

Storage Temperature Range	-20°C – 60°C
Storage Humidity Range	<85%
Altitude	0 – 2,000m (6561 Feet)
Operating Temperature	0°C – 40°C
Operating Humidity Range	<80%

REQUIRED APPROVALS

UL, C-UL, NOM	UL, C-UL, FCC (B)
---------------	-------------------

SERVICE/LIMITED WARRANTY

Warranty: Parts/Labor	2 Year/2 Year
MTBF (Approx.)	60K Hours


ACCESSORIES (SUPPLIED)

Remote Control	Yes
Power Cord	Yes – 6 Feet

ACCESSORIES (OPTIONAL)

AP-60DA13 Desktop Stand (WxHxD)	45.7" x 15.5" x 16.3"
Weight	47.3 Lbs.
AP-60SA12 Speaker (WxHxD) each	5.2" x 34.8" x 3.9"
Weight	11.4 Lbs.
AP-60SA12D Speaker Stand (WxHxD)	8.7" x 8.6" x 8.7"
Weight	8 Lbs.
Wall Mount	PWMT200

REAR JACK PANEL

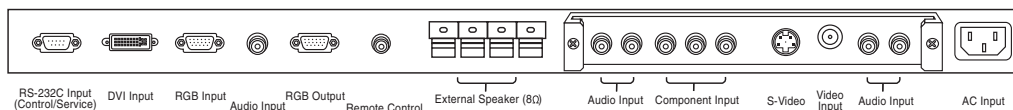

www.LGcommercial.com

LG Electronics U.S.A., Inc. 2000 Millbrook Drive, Lincolnshire, IL 60069 Customer Service: 1-888-865-3026
Dimensions and weights are approximate. Design and specifications subject to change without notice. The "LG Life's Good" is a registered trademark of LG Electronics U.S.A., Inc. ©2006 LG Electronics U.S.A., Inc. Printed in the USA. LG6095V0706

